

NEW



PI 640 G7

High-resolution infrared camera for the glass industry including line scan function



innovative infrared technology




High-resolution thermal imaging solution for the glass industry

Features:

- Line scan function through license-free analysis software optris® PI Connect
- Compact in size: 46 mm x 56 mm x 90 mm
- Frame rate of up to 125 Hz
- Max. scan angle of 111° with 800 pixels per line

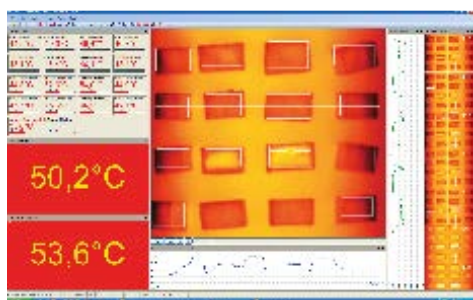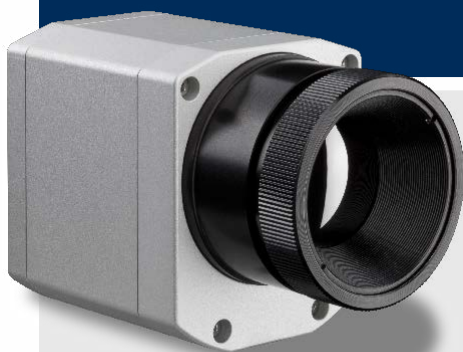

Infrared camera with line scan mode

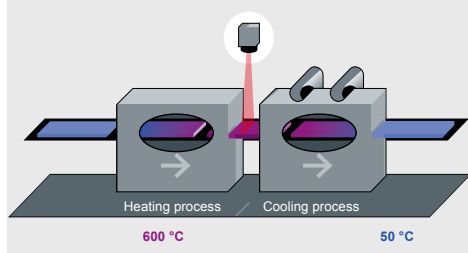

For further information on non-contact temperature measurement in the glass industry, please visit www.optris.com/temperature-measurement-glass-industry

Type	PI 640 G7
Optical resolution	640 x 480 pixels
Detector	FPA, uncooled (17 µm x 17 µm)
Spectral range	7.9 µm
Measurement range	200 ... 1500 °C
Sighting range	0 ... 250 °C
Frame rate	32 Hz / 125 Hz @ 640 x 120 pixels
Optics (FOV)	33° x 25° (f = 18.7 mm) 15° x 11° (f = 41.5 mm) 60° x 45° (f = 10.5 mm) 90° x 64° (f = 7.7 mm) max. FOV: 111° / 800 pixels (diagonal scan line / 90° lens)
Thermal sensitivity (NETD) at T _{Obj} = 650 °C	130 mK
Accuracy	±2 °C or ±2 %, whichever is greater
PC interface	USB 2.0
Process interface (PIF), standard	0 – 10 V input, digital input (max. 24 V), 0 – 10 V output
Process interface (PIF), industrial	2x 0 – 10 V input, digital input (max. 24 V), 3x 0 – 10 V output, 3x relay (0–30 V/ 400 mA), fail-safe relay
Cable length (USB)	1 m (standard), 5 m, 10 m 5 m and 10 m also as HT cable (180 °C)
Ambient temperature	0 ... 50 °C
Storage temperature	–40 ... 70 °C
Relative humidity	20 – 80 %, non-condensing
Enclosure (size / rating)	46 mm x 56 mm x 90 mm / IP 67 (NEMA 4)
Weight	320 g, incl. lens
Shock ¹⁾	IEC 60068-2-27 (25 g and 50 g)
Vibration ¹⁾	IEC 60068-2-6 (sinus-shaped) / IEC 60068-2-64 (broadband noise)
Tripod mount	¼ – 20 UNC
Power supply	USB powered
Scope of supply (standard)	<ul style="list-style-type: none"> • USB camera with 1 lens • USB cable (1 m) • Table tripod • PIF cable (1 m) incl. terminal block • Software package optris® PI Connect • Rugged outdoor case

¹⁾ for more details see operator's manual